

SUMNER approved stone veneer fully adhered using SUMNER Grip to 9mm SUMNER Board after first coating with SUMNER Primer.

SUMNER VERMINI Battens 45x18mm over Frame Protection System complying with NZBC

PROTECTA-COAT by others from fbsltd.co.nz

Hilti HPS-1 R 6/40x65 anchor securing sheet over batten at 220mm centres

0.7mm Grade 316 stainless steel flashing by others (see inset detail)

Flashing tape designed for sealing around windows and doors

SUMNER L Fixings at 600mm Vertical and Horizontal centres

5mm min.


4mm aluminium head angle by others welded to jamb angle at corners. Length manufactured to finish 1mm proud of external face of stone veneer

Continuous sealant bead

Structural masonry wall, as per NZBC for either Blockwork, Tiltslab or Solid Pour Concrete

Air Seal

Jamb reveal angle beyond

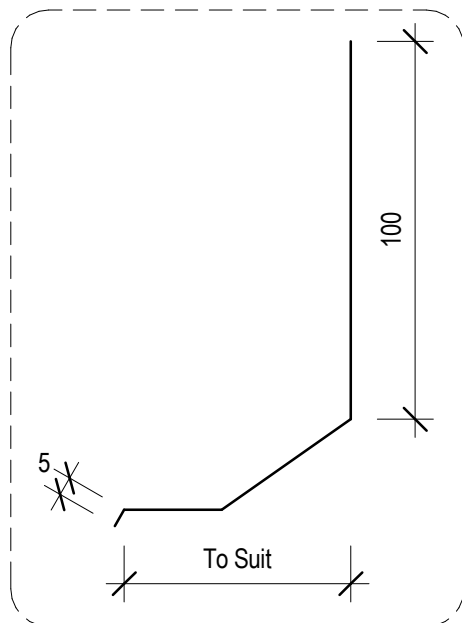

**CODEMARK™**  
BCS-171817-CMNZ



**SUMNER**  
PROFESSIONAL CLADDING SYSTEMS

[www.sumnerschist.co.nz/](http://www.sumnerschist.co.nz/)

## Approved Stone Veneer on SUMNER Tile System

Window Detail-Head-Deep Reveal-Masonry

Date April 2019

Drawn by SUMNER

Checked by DS

**3.1.2**

Scale 1 : 2